

Reference Description Collection


G3994100 Basin mixer with high spout ODRA





TECHNICAL SPECIFICATIONS

D	Single lever mixer with cold start	
(5)	Flow restrictor to 5 l/min included	
	AENOR certification	
ð	Contributes to obtaining BREEAM, LEED and VERDE certifications through its sustainable use of water	
Ó	Produced with recycled materials	
	The alloy used to produce it is included in the "European Positive List" (no migration of harzarous materials to water)	
	Low noise level	
	G-Last chrome technology: high resistance against scratches	
	Ceramic discs cartridge ø35 mm	
	3/8" flexible connection hoses included	
	Installation with up-down valve	

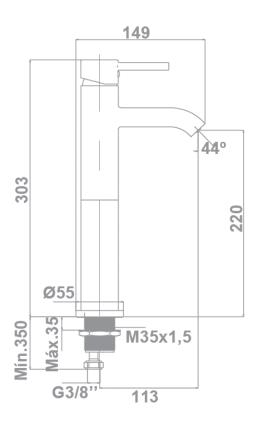

FLOW RATE

l/min	I					
20	T					
19	+					
18						
17						Water Laber
16	+					
15	+					
14	+					4 1/min
13	+					
12	+					
11	+					
10	+					
9	+					
8	+					
7	+					
6	+					
5	+					
4						
3						277 kWh/p.a.
2						
1						LOW ENERGY HEA
0	1		1	1	1	
	1bar	2bar	3bar	4,15bar	5bar	