



Bañera No Hidro

The bath Flex Center is ideal for two people that share a bathroom comfortably.

FLEX CENTER

Rectangular non-hydro  
180x100. "L" right hand black  
skirting panel

REF: 65572

The FLEX CENTER bath, in view of its large dimensions and its two headrests, is designed to be able to share a relaxing bath.

Includes two headrests. Price includes metallic black side or front skirting panel.

PVP:

REF. 65572

COLORES / ACABADOS

01  
Blanco

ARTÍCULOS

Ref.	Producto/Conjunto	Medidas	€/u
65572	Bañera con bastidor, desagüe y 2 reposacabezas.	180 x 100 cm	2.140,0 €

INFORMACIÓN DE PRODUCTO

Características

Flex Center with chassis, waste and 2 headrests. With special "L" front or side black skirting panel . Right-hand.

Información de utilidad

Gala baths may be purchased with or without skirting panel. The location of the hydromassage system facilitates the installation of the enclosure. The chassis is free-standing, enabling its installation with the least possible disruption. The disinfectant for hydromassage baths with automatic disinfection is available at Gala.

Garantía

Gala products are guaranteed against any manufacturing defects, from the date of purchase of the product, only if the installation has been carried out in accordance with Gala´s installation instructions and, applying the current legislation on electrical and sanitary appliances, by authorised staff. The guarantee period for acrylic products is of 3 years.

Please check our product installation manuals.

Certificaciones

High quality is a constant at Gala in order to guarantee the technical and aesthetic features as well as the performance of our products. Please check our product quality certificates.

Mantenimiento

Cleaning of the bath should be carried out using a soft sponge, soap and water. After cleaning, the bath should be dried so as to prevent limescale forming. No abrasive products, solvents or objects that could damage the bath surface should be used. Should the bath surface be scratched accidentally, it should be enough just to go over the surface with a solvent-free polish. If necessary, the scratch can first be wet-sanded with 800 G wet-and-dry sandpaper, then wet-sanded with 1200 G paper, before finally applying the polish.

COMPLEMENTOS




SUGERENCIAS



AMBIENTE





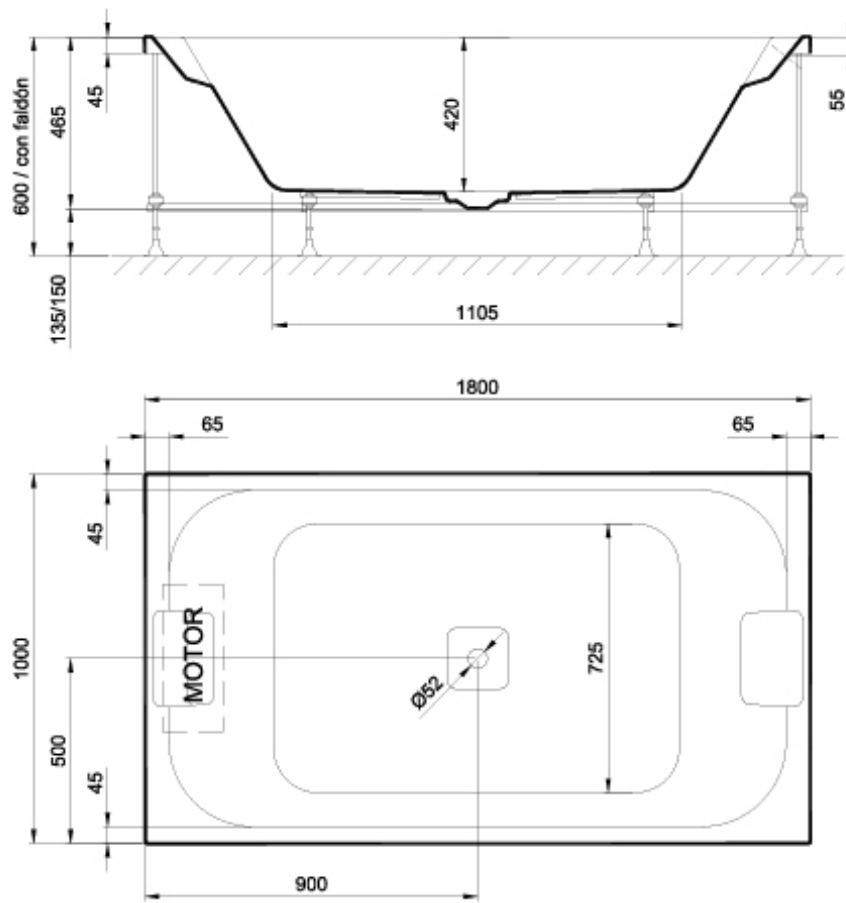





DIBUJOS TÉCNICOS





DESCARGAS




2D

	132.41 KB	 Rectangular non-hydro 180x100. "L" right hand black skirting panel - Técnico (.AI)
	342.97 KB	 Rectangular non-hydro 180x100. "L" right hand black skirting panel - Técnico (.DWG)
	2.64 MB	 Rectangular non-hydro 180x100. "L" right hand black skirting panel - Técnico (.DXF)
	134.26 KB	 Rectangular non-hydro 180x100. "L" right hand black skirting panel - Técnico (.PDF)

3D

	1.2 MB	 Rectangular non-hydro 180x100. "L" right hand black skirting panel - 3D (.DWG)
---	--------	--

bimobject™

	ArchiCAD	
	Revit	